

1 Operation

1



www.schaeffler.de/std/1F40










vl_fis-support@schaeffler.com


2




3



NYM 2×0,75 mm²




4

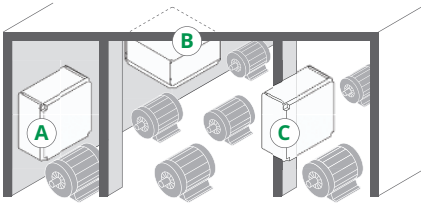


001B2E56

5

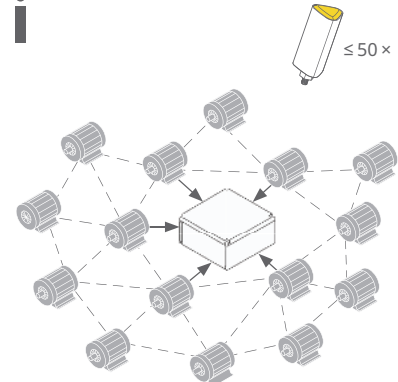

≤ 50 x



001B2E69

6

1. www.schaeffler.de/std/1F41



7

2.



8

3.



1.



2.



3.




4.



9

4.

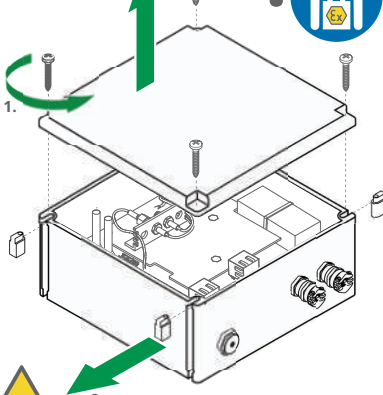


1.



2.




3.



001D0F29

10


5.

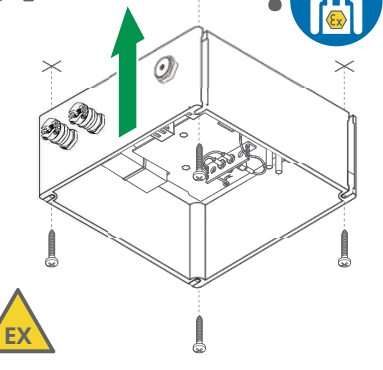

001D0F28

11

6.

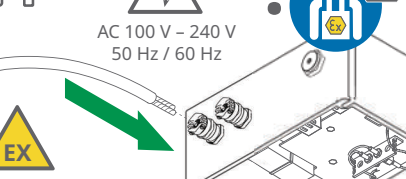


AC 100 V – 240 V
50 Hz / 60 Hz

001D0F26

12


7.

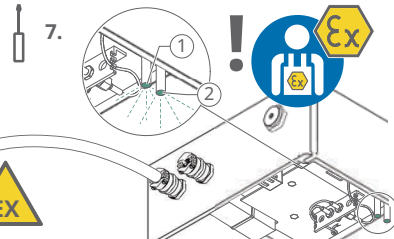

001D0F24

13

8.

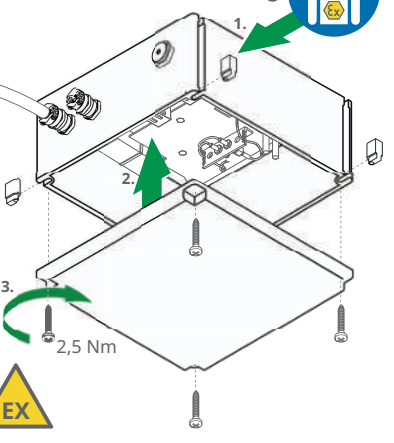

2,5 Nm

001D0F22

14



<https://www.schaeffler.de/std/1FFF>

001AD840

Schaeffler Monitoring Services GmbH
Kaiserstraße 100
52134 Herzogenrath
Germany
www.schaeffler.de/en/services

Technical support:
www.schaeffler.de/en/technical-support

All information has been carefully compiled and checked by us, but we cannot guarantee complete accuracy. We reserve the right to make corrections. Therefore, please always check whether more up-to-date or amended information is available. This publication supersedes all deviating information from older publications. Printing, including excerpts, is only permitted with our approval.
© Schaeffler Monitoring Services GmbH
BA 68-07 / 02 / 0m-0M / 2025-12